

JNMM120-365~375L

High efficiency mono solar module

JNMM120

All cell production line equipped with SE laser instrument.

Advanced process to reduce extra degradation of PERC cell.

MBB and half-cut design to improve module reliability and reduces loss.

Higher power output effectively reduces BOS and LCOE.



Advanced production process

Optimized MBB design
Cell efficiency >22.8%



Superior quality control

Full automatic production line
MES and ERP digitizing logistics management
100% three times EL and appearance inspection



Excellent power generation performance

0~+5W positive power tolerance
Improved low light irradiance performance and low degradation



Stable mechanical performance


Passed rigorous hail test
Withstands 5400Pa snow and 2400Pa wind loads

CERTIFICATION




TUV: IEC/EN 61215, IEC/EN 61730
BIS: IS 14286/IEC 61215, IS/IEC 61730
GB/T 19001-2016/ISO 9001:2015
GB/T 24001-2016/ISO 14001:2015
OHSAS 18001:2007
CNAS-CL01: ISO/IEC 17025:2017

QUALITY ASSURANCE

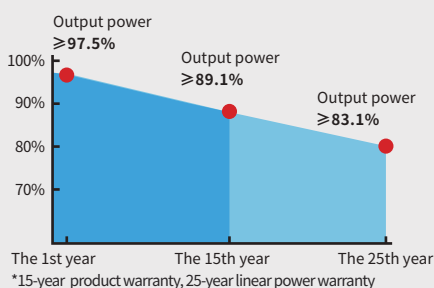

JINNENG CLEAN ENERGY TECHNOLOGY LTD JINNENG PHOTOVOLTAIC TECHNOLOGY LTD

No.1 Wenshui Economic Development Zone, Lvliang, Shanxi 032100, China
No. 533, East Guang'an Street, Yuci District, Jinzhong, Shanxi 030600, China
Tel: +86(354)2037999 E-mail: sales@jinery.com

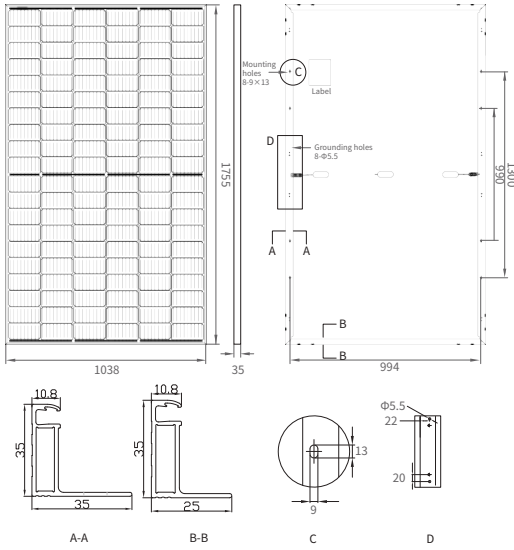

MECHANICAL PARAMETERS

| | |
|---|---|
| Cell (mm) | 166*83 Mono |
| Dimensions (L*W*H) (mm) | 1755*1038*35/40 1765*1048*35/40 |
| Weight (kg) | 19.5/19.8 19.6/19.9 |
| Cable Cross Section Size (mm ²) | 4 |
| Cable Length (mm) | Positive 295 / Negative 145 |
| No. of Cells & Connections | 120(6*20) |
| No. of Diodes | 3 |
| Type of Connector | PV-KST4/xy-UR, PV-KBT4/xy-UR PV-JN01/PV-KST4-EVO 2/xy_UR, PV-KBT4-EVO2/xy_UR |

QUALIFICATION

| | |
|--|-------------|
| Max. System Voltage (V DC) | 1000 |
| Temperature Cycling Range (°C) | -40~+85 |
| Max. Series Fuse Rating (A) | 20 |
| Max. Wind Load / Max. Snow Load (Pa) | 2400 / 5400 |
| Hot Spot Rate | 100% Free |
| Fire Rating | Class C |
| Junction Box & Connector Protection Grad | IP68 |

TEMPERATURE COEFFICIENTS


| | |
|---|------------|
| Nominal Module Operating Temperature (NMOT) | 43±2°C |
| Temperature Coefficient Voltage (Voc) | -0.29 %/°C |
| Temperature Coefficient Current (Isc) | 0.04 %/°C |
| Temperature Coefficient Power (Pm) | -0.37 %/°C |

ELECTRICAL PARAMETERS

| Module Type | JNMM120-365L | JNMM120-370L | JNMM120-375L | |
|--|-------------------------------|--------------|--------------|-------|
| STC AM1.5 1000W/m ² Cell Temperature 25°C | Max. Power at STC (Pmpp/W) | 365 | 370 | 375 |
| | Output Tolerance (W) | 0-+5 | 0-+5 | 0-+5 |
| | Max. Power Voltage (Vmp/V) | 33.89 | 34.08 | 34.28 |
| | Max. Power Current (Imp/A) | 10.77 | 10.86 | 10.95 |
| | Open Circuit Voltage (Voc/V) | 41.10 | 41.30 | 41.50 |
| | Short Circuit Current (Isc/A) | 11.28 | 11.37 | 11.46 |
| | Module Efficiency (%) | 20.0 | 20.3 | 20.6 |
| NMOT AM1.5 800W/m ² Ambient Temperature 20°C Wind Speed 1m/s | Max. Power at NMOT (Pmpp/W) | 274.7 | 278.5 | 282.2 |
| | Max. Power Voltage (Vmp/V) | 31.88 | 32.05 | 32.22 |
| | Max. Power Current (Imp/A) | 8.62 | 8.69 | 8.76 |
| | Open Circuit Voltage (Voc/V) | 38.80 | 38.99 | 39.18 |
| | Short Circuit Current (Isc/A) | 9.08 | 9.15 | 9.23 |

* Measurement tolerance: Pmax:±3%, Voc:±3%, Isc:±5%.

I-V CURVE(370W)

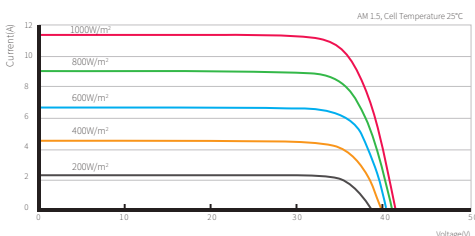

PACKING CONFIGURATION

| | |
|------------------------------|-----------------|
| Container (High cube) | |
| Pieces Per Pallet | 31/27/31/27 |
| Pallets Per Stack | 2 |
| Stacks Per Container | 13 |
| Pieces Per Container | 806/702/806/702 |